08/2017 Page 1

Specifications. The new BMW M5.



		BMW M5		
De de l				
Body		415		
No of doors/seats		4/5		
Length/width/height (unladen)		4965/1903/1473		
Wheelbase	mm	2982		
Track, front/rear	mm	1626/1595		
Ground clearance	mm	132		
Turning circle	m	12.6		
Fuel tank capacity	approx. I	68		
Cooling system incl. heater		16.0		
Engine oil ¹⁾		10.0		
Weight, unladen, to EU	kg	1930/1855		
(incl. driver/excl. driver)				
Max load to EU	kg	585		
Max permissible weight	kg	2440		
Max axle load, front/rear	kg	1215/1260		
Max trailer load,	kg	2000/750		
Braked (12%)/unbraked	-			
Max roofload/max towbar	kg	100/90		
download	5			
Luggage comp capacity		530		
Air resistance	c _d x A	0.758		
Power Unit				
Config/No of cyls/valves		V/8/4		
Engine technology		M TwinPower Turbo technology with cross-bank exhaust manifold,		
		M TwinScroll TwinTurbo, indirect charge air cooling, High Precision Injection,		
		maximum injection pressure 350 bar, VALVETRONIC fully variable valve timing,		
		Double-VANOS variable camshaft timing		
Effective capacity	CC	4395		
Stroke/bore	mm	88.3/89.0		
Compression ratio	:1	10.0		
Fuel	. 1	RON 98 (min. RON 91)		
	k///bp	441/600		
Max output	kW/hp			
at	rpm	5600 - 6700		
Max torque	Nm/lb-ft	750/553		
at	rpm	1800 – 5600		
Electrical System				
Electrical System Battery/installation	Ah/-	70 (li-ion)/ Luggage		
Datteryninstallation	An/-	compartment		
Alternator	AW	249/3486		
Alternator	~~~	243/0400		
Driving Dynamics and Safe	etv			
Suspension, front	-	Adaptive M suspension with double wishbone axle in lightweight aluminium		
		construction, M-specific kinematics and elastokinematics, Variable Damper		
		Control (VDC)		
Suspension, rear		Adaptive M suspension with five-link axle in lightweight aluminium construction,		
	M-specific elastokinematics, Variable Damper Control (VDC)			
Brakes, front		M compound brakes, vented, with six-piston fixed callipers		
Brakes, rear		M compound brakes, vented, with single-piston floating callipers		
Driving stability systems		Standard: DSC incl. ABS, ASC and M Dynamic Mode (MDM), can be switched of		
Driving stability systems	,	CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking		
		function, Start-Off Assistant, Active M Differential, DSC linked with M xDrive all-		
Cofety equipment		wheel drive		
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front		
		passenger, head airbags for front and rear seats, three-point inertia-reel seatbel		
		on all apote with halt at an architely to the territorian and halt fame. But the second		
		on all seats with belt stopper, belt latch tensioner and belt force limiter, crash active front head restraints, crash sensors, tyre pressure indicat		

08/2017 Page 2

		BMW M5		
Steering			Electric Power Steering (EPS) with M-specific Servotronic function and variable	
0			sport ratio	
Steering ratio, overall		:1	14.3	
Tyres, front/rear			275/40 ZR 19 102Y	
			285/40 ZR 19 104Y	
Rims, front/rear			9.5 J x 19 Light Alloy	
			10.5 J x 19 Light Alloy	
Power transfer				
			M xDrive intelligent al-wheel drive, central transfer case with fully-variable multi	
			plate clutch, fully-variable torque distribution between front and rear axle,	
			differential with fully-variable Active M Differential, locking effect 0 – 100 per	
			cent	
Transmission				
Type of transmission			Eight-speed M Steptronic transmission with Drivelogic, transmission oil coolir	
Gear ratios	I	:1	5.000	
	II	:1	3.200	
		:1	2.143	
	IV	:1	1.720	

II			
	R :1	4.172	
Final drive	:1	3.150	
Performance			
Power-to-weight ratio	kg/kW	4.2	
EU excl. driver	-		
Output per litre	kW/I	100.3	
Acceleration 0–100/200 km/h s		3.4/11.1	
Top speed	km/h	250/305 ²⁾	

BMW EfficientDynamics

V

VI

VI VI :1

:1 :1

:1

BMW EfficientDynamics standard features

Brake Energy Regeneration, Electric Power Steering, Auto Start Stop function, Optimum Shift Indicator in manual shift mode, intelligent lightweight design, BMW Efficient Lightweight, on-demand operation of ancillary units, li-ion battery; mapregulated oil pump, differential and transfer case with optimised warm-up behaviour, aerodynamics (underside panelling, front spoiler, rear spoiler)

1.313

1.000

0.823

0.640

Fuel Consumption ECE ³⁾						
With standard tyres:						
Urban	l/100 km	14.5				
Extra-urban	l/100 km	8.2				
Combined	l/100 km	10.5				
CO ₂	g/km	241				
Emission rating		EU6				

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)


 $^{1)}$ Oil change with filter $^{2)}$ Limited / with optional M Driver's Package $^{3)}$ Provisional fuel consumption and CO $_2$ emissions depend on the selected tyre format

Further information on official fuel consumption figures, specific CO₂ emission values and the electric power consumption of new passenger cars is included in the following guideline: "Leitfaden über Kraftstoffverbrauch, die CO₂-Emissionen und den Stromverbrauch neuer Personenkraftwagen" (Guideline for fuel consumption, CO₂ emissions and electric power consumption of new passenger cars), which can be obtained from all dealerships, from Deutsche Automobil Treuhand GmbH (DAT), Hellmuth-Hirth-Str. 1, 73760 Ostfildern-Scharnhausen and at http://www.dat.de/en/offers/publications/guideline-for-fuel-consumption.html.

BMW Media Information

08/2017 Page 3 Output and torque diagram. The new BMW M5.



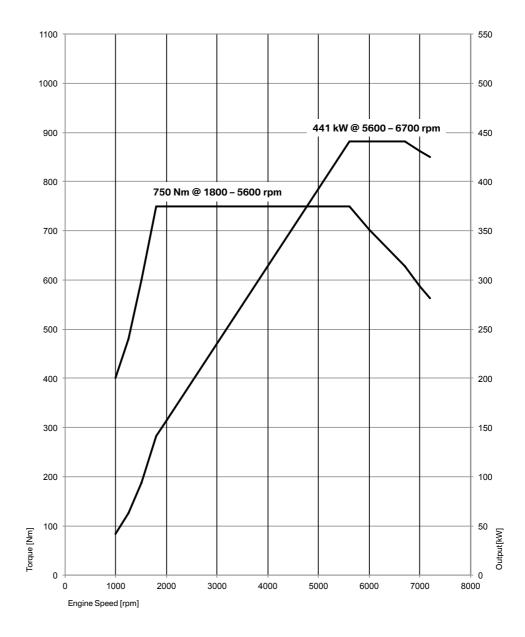

BMW Media Information

08/2017 Page 4

Exterior and interior dimensions.



The new BMW M5.

